



# Hawk™

## Level 1 Sound Attenuated Enclosure

Weather protective and metal clad design


Solid roof skin

Factory assembled

All aluminum construction

UL 142 and 2085 listed sub-base fuel tanks

### LISTINGS & MFR. STANDARDS




Fuel Tank	UL142 & UL 2085
Hinges	316 Stainless Steel
Perforated skin	5052 Alloy
Paint and Power Coating	VOC Compliant
Aluminum Extrusions	ASTM B221
Rivets	IFI 114
Screws	FF-S-92
Insulation	ASTM E84

### FEATURES

Sound Rating	10-15 dB(A) Reduction
Distance	23 feet / 7m
Roof Type	Solid Skin
Hardware	316 Stainless Steel
Door Frames	Z-Bar Extruded
Rain Prevention	Aluminum H-Channel
Lifting Provisions	4-Point
Rub Rail Material	1/8" 6063 Aluminum
Insulation Type	Fiberglass
Perforated Skin Thickness	.032" Standard
Outer Skin Thickness	.063" Standard
Door Handles	T-Latch Key Lockable
Gasket Material	Silicone Rubber with UV protection
Door Seals	Buna-N-Rubber with PSA
Louver Blades	Extruded Frames and Blades 6063 alloy
Silencer Configuration	Internal / External
Wall / Roof Insulation	Fiberglass / Mineral Wool
Sub Base Capacity	100 -4000 Gallon
Enclosure Layout	Skin Tight / Walk In / Semi - Walk In
Bird Screen	Aluminum Expanded .080" Thickness

### ORDERING INFORMATION

Example: Part Number: **H0750-IC-1000-4**

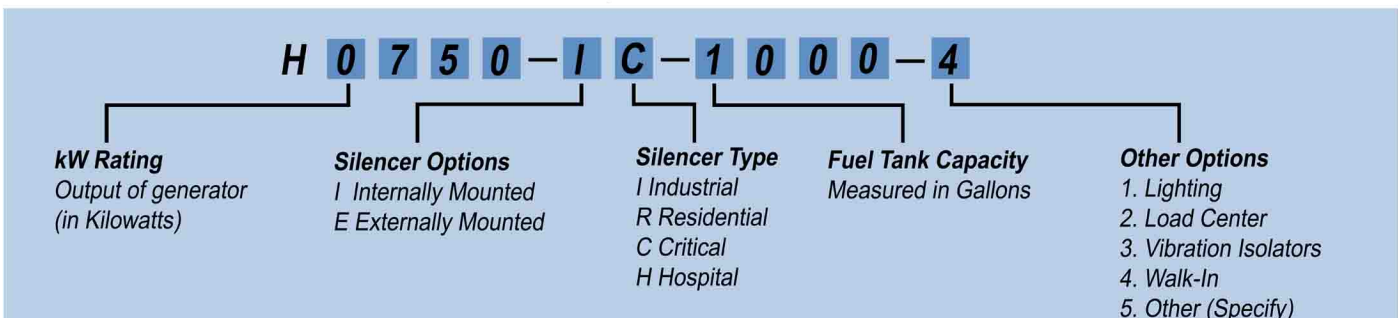

For custom designs and technical assistance call 877-214-1002 or visit us online at [www.cobra-power.com](http://www.cobra-power.com)